


Axygen® Brand Equipment Product Selection Guide

AXYGEN®

A Corning Brand

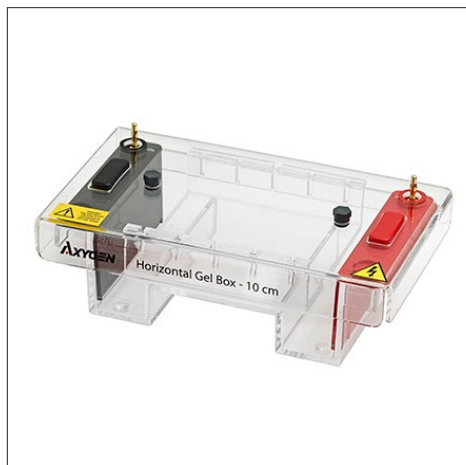

Product Ordering Information

Ordering Products Direct from Corning

For our U.S. customers who currently have Corning accounts, you can order direct through our Customer Service group or online:

t: 800.492.1110, prompt 2

f: 978.442.2476

CLSCustServ@corning.com

www.corning.com/lifesciences

Hours of Operation: Monday to Friday, 8:00 a.m. to 6:00 p.m. (Eastern Standard Time)

Customers outside of the U.S., please contact your local Corning distributor, www.corning.com/lifesciences.

Phone/Fax Orders

For each order, customers should provide the Corning product number, product description, and desired quantity. You should also include your billing and shipping address and your Corning account number.

Online Orders

In order to purchase Corning products online, please visit the Corning Life Sciences website at www.corning.com/lifesciences. Click on “Order Now, Login” and complete the online registration form. Customers using credit cards may immediately place orders. Full Service Direct accounts with account specific contract pricing will need to establish a direct account with Corning Customer Service before online transactions can be made. You can complete the online registration form or contact Corning Customer Service directly at 1.800.492.1110 in order to establish a direct account with Corning.

To purchase Corning Equipment products, visit www.corning.com/lifesciences/equipment.

Ordering Products Through our Distribution Partners

Customers can purchase Corning products from any one of our more than 50 authorized distributors. See our complete listing of Corning distributors online at www.corning.com/lifesciences. Our distribution partners can offer our customers a variety of value added services from local inventory and service, to managed services, and preferred programs. Please contact your distributor of choice for more details.

Pricing

Prices shown on the Corning Life Sciences website (in our online www.corning.com/lifesciences catalog) reflect our current suggested U.S. list price. For customer specific pricing information, please contact Corning Customer Service or your authorized Corning Distributor.

Product Return Policy

To return product, contact your local Customer Service Representative. The order and lot number details are required. Please have this information available to obtain a Return Authorization Number. This Return Authorization Number must be referenced on the outside of the shipping carton. Returns without an approved Return Authorization Number will be refused and returned at the customer's expense.

Table of Contents

Axygen® Gel Documentation Systems	1
Axygen Horizontal Gel Boxes	4
Axygen MaxyGene II Thermal Cyclers	7
Axygen PlateMax Semi-automatic Plate Sealers	9
Axygen Axyspin Refrigerated Microcentrifuges	11
Axygen Axyspin Mini Plate Spinner Centrifuges	12
Axygen Axypet® Pro Single- and Multi-Channel Pipettors	13
Axygen Axypet Single- and Multi-channel Pipettors	14
Axygen Axypet 16-channel Pipettors	16
Axygen MotoPet® Pipet Controller	17

Axygen® Gel Documentation Systems



Axygen Gel Documentation System-BL



Axygen Gel Documentation System

Axygen Gel Documentation systems easily capture publication quality, 16 bit TIFF images. The systems are quick to set up and have an intuitive user interface for image capture, annotation, and contrast adjustment. Images are easily saved and opened in common gel analysis software for more detailed analysis.

- ▶ Auto exposure—you never have to manually manipulate the camera
- ▶ Ready-to-use—just connect the computer* and load the software
- ▶ Long-life dual wavelength transilluminators
- ▶ Exceptionally high resolution (5.4 MP) camera
- ▶ The cabinet is compact with an ultra-violet (UV) cut-off switch to prevent exposure to UV light if the cabinet door is opened while the UV light is on.

Choose from Two Axygen Gel Documentation Systems

The **Axygen Gel Documentation System** is an ideal system for labs that want good value without compromising ease of use or image quality. It includes a dual-wavelength transilluminator, 5.4 MP image resolution camera, and image acquisition software (PC not included).

The **Axygen Gel Documentation System-BL** has all the features of the standard Axygen Gel Documentation system, as well as built-in blue lights and a built-on Microsoft® Windows® tablet. The blue lights are designed for use with EtBr replacement dyes to prevent damage to DNA that will be excised for subsequent analysis.


Features

- ▶ Darkroom tab lets you select from UV 302, UV 365, Epi White, or Epi Blue (BL system only) light sources, as well as an optional Trans White light illumination tray.
- ▶ Auto Exposure tool calculates the optimal exposure time with just a single click. You can also use the Slider tool to manually adjust the exposure time and view an updated live image.
- ▶ Select ROI tool allows you to select a region of interest. The Auto Exposure calculations are only based on the selected region. This feature is especially useful for gels that have either intense or faint bands.
- ▶ Band Excision tool allows you to temporarily override the safety precautions in the system to view the gel with the lights on.**
- ▶ Imaging tools include crop, rotate, resize, contrast, saturation, and zoom. Annotation tools include a variety of text and drawing tools. Finished images can be saved, printed, emailed, or exported for further analysis.
- ▶ Transillumination bulbs last for 30,000 hours—which equals over 3.5 years if the bulbs were in continuous use.

*BL model includes tablet computer with software already included.

**Always wear protective eyewear when working with UV light.

Everything You Expect From a High Resolution Gel Doc System—Except the High Price.

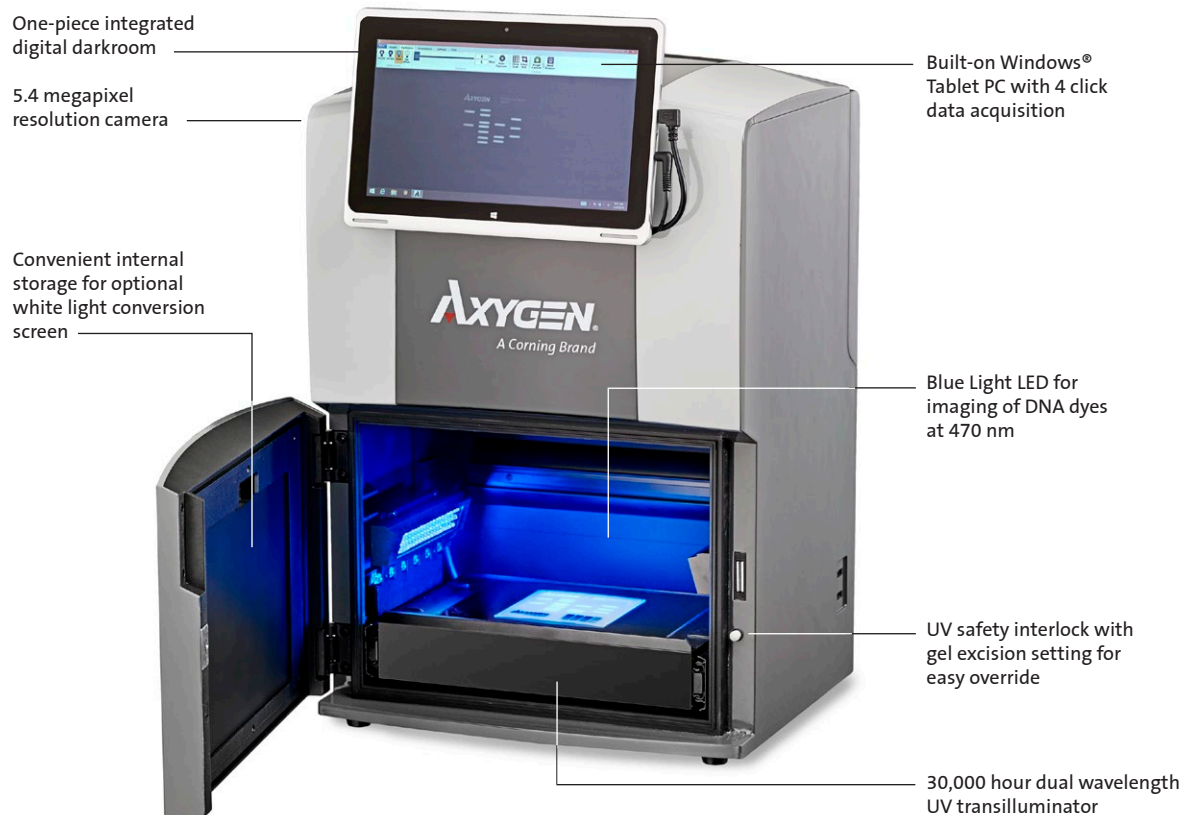

Axygen® Gel Documentation System-BL

Specifications

Axygen System	Gel Documentation System	Gel Documentation System-BL
Camera	5.4 MP image resolution	5.4 MP image resolution
Lens	f1.8	f1.8
Light Sources	<ul style="list-style-type: none"> ▶ Epi White ▶ Dual wavelength transillumination at 302 nm and 365 nm 	<ul style="list-style-type: none"> ▶ Epi White ▶ Dual wavelength transillumination at 302 nm and 365 nm ▶ Epi Blue
Trans White Light Illumination Tray	Optional	Optional
Field of View	15 cm x 20 cm	15 cm x 20 cm
Cabinet	<ul style="list-style-type: none"> ▶ Door sensor to prevent accidental exposure to UV; automatically shuts off UV light when door is open ▶ Safety override, enabling band cutting on the UV transilluminator with automatic turn off after 5 minutes 	<ul style="list-style-type: none"> ▶ Door sensor to prevent accidental exposure to UV; automatically shuts off UV light when door is open ▶ Safety override, enabling band cutting on the UV transilluminator with automatic turn off after 5 minutes
Emission Filter	590 nm	590 nm
3-position Filter Slider	No	Yes
Certifications	CE, cTUVus	CE, cTUVus
Product Footprint	12" x 15" (30.48 cm x 38.1 cm)	12" x 15" (30.48 x 38.1 cm)
Computer	<ul style="list-style-type: none"> ▶ Operating system: Microsoft® Windows® 7 or higher ▶ Minimum hardware requirements: Intel® processor, 1.4 GHz processor speed, 2 GB RAM, 16 GB free hard disk space, 2 USBs 	<ul style="list-style-type: none"> ▶ Tablet included: Windows 8 tablet computer enables compatibility with existing networks, as well as easy setup (also Windows 10 compatible) ▶ Bluetooth and wireless compatible, or USB to LAN compatible ▶ 10.1" touch screen ▶ 2 GB of storage for short-term data saving

Ordering Information

Axygen® Gel Documentation Systems and Accessories

Cat. No.	Description	Qty/Pk	Qty/Cs
GD-1000	Gel Documentation System	1	1
GDBL-1000	Gel Documentation System-BL	1	1
GD-BLCS	Gel Documentation System blue light conversion screen for GD-1000	1	1
GD-WLCS	Gel Documentation System white light conversion screen for GD-1000 and GDBL-1000	1	1
GD-GCT	Gel carrying tray for GD-1000 and GDBL-1000	1	1
GD-PRT	Thermal printer	1	1
GD-PAPER	Thermal printer paper	1	1
GD-1D	1 user license of Total Lab 1D (more user licenses available upon request)	1	1
GD-1DN	1 user Network license of Total Lab 1D (more user licenses available upon request)	1	1
GDBL-BLUE	Optional blue filter (497 nm)	1	1
GDBL-GREEN	Optional green filter (572 nm)	1	1
GD-GCS	UV transmitting tray that protects UV transilluminator when cutting out bands	1	1
GD-OG	Orange glasses ideal for reducing background when cutting out bands with blue light	1	1
GD-USBS	USB hub	1	1
GD-USBMK	USB mouse and keyboard	1	1

Related Products

Axygen Gel Cutting Pipet Tips

Cat. No.	Description	Qty/Pk	Qty/Cs
TGL-1165-R	1.1 mm x 6.5 mm gel cutting pipet tips	480	2,400
TGL-1165	1.1 mm x 6.5 mm gel cutting pipet tips	250	2,500
TGL-1140-R	1.1 mm x 4 mm gel cutting pipet tips	480	2,400
TGL-1140	1.1 mm x 4 mm gel cutting pipet tips	250	2,500

Axygen Gel Loading Pipet Tips

TGL-10FT-17-R	0.17 mm, 10 µL racked flat gel loading pipet tips	400	400
TGL-200FT-37-R-S	0.37 mm, 200 µL racked flat gel loading pipet tips, sterile	400	400
TGL-200FT-37-R	0.37 mm, 200 µL racked flat gel loading pipet tips	400	400
TGL-200RD-57-R-S	0.57 mm, 200 µL racked round gel loading tips, sterile	400	400
TGL-200RD-57-R	0.57 mm, 200 µL racked round gel loading tips	400	400

Axygen DNA Markers

M-DNA-100BP	100 bp DNA ladder	500 µL	500 µL
M-DNA-1KB	1 kb DNA ladder	500 µL	500 µL

Axygen Agarose

AGR-LE-100	Agarose LE, low EEO, molecular biology grade, 100 g	1	1
AGR-LE-1001	Agarose LE, low EEO, molecular biology grade, 100 g	10	10
AGR-LE-500	Agarose LE, low EEO, molecular biology grade, 500 g	1	1
AGR-LE-5001	Agarose LE, low EEO, molecular biology grade, 500 g	10	10
AGR-LM-50	Agarose LM, low melting, molecular biology grade, 50 g	1	1
AGR-LM-501	Agarose LM, low melting, molecular biology grade, 50 g	10	10
AGR-LM-100	Agarose LM, low melting, molecular biology grade, 100 g	1	1
AGR-LM-1001	Agarose LM, low melting, molecular biology grade, 100 g	10	10
AGR-MS-50	Agarose MS, PCR screening, molecular biology grade, 50 g	1	1
AGR-MS-501	Agarose MS, PCR screening, molecular biology grade, 50 g	10	10
AGR-MS-100	Agarose MS, PCR screening, molecular biology grade, 100 g	1	1
AGR-MS-1001	Agarose MS, PCR screening, molecular biology grade, 100 g	10	10

Corning® Buffers


46-011-CM	10X TBE Buffer, liquid	6 x 1L	6 x 1L
46-010-CM	10X TAE Buffer, liquid	6 x 1L	6 x 1L

Axygen® Horizontal Gel Boxes

Axygen horizontal gel boxes are high quality, full featured units designed for exceptional durability and efficiency. The gel boxes feature leak-free external gel casting, which allows you to cast one gel outside of the box while another gel is running inside. The units are available in four different sizes, and each unit comes with two sizes of gel trays. In addition, they have easy to replace electrodes that are recessed to reduce potential damage. These gel boxes are an excellent value that will provide years of reliable service.


Features

- ▶ Flexibility – each unit comes with 2 sizes of gel trays to optimize applications.
- ▶ External gel casting to gel box allows for running gels while casting the next one.
- ▶ Ease of use – the Axxygen contrast enhancer makes loading gels easier.
- ▶ Rugged injection molding is supported by a 3-year warranty.
- ▶ Larger units come with recirculation ports allowing for buffer exchange.

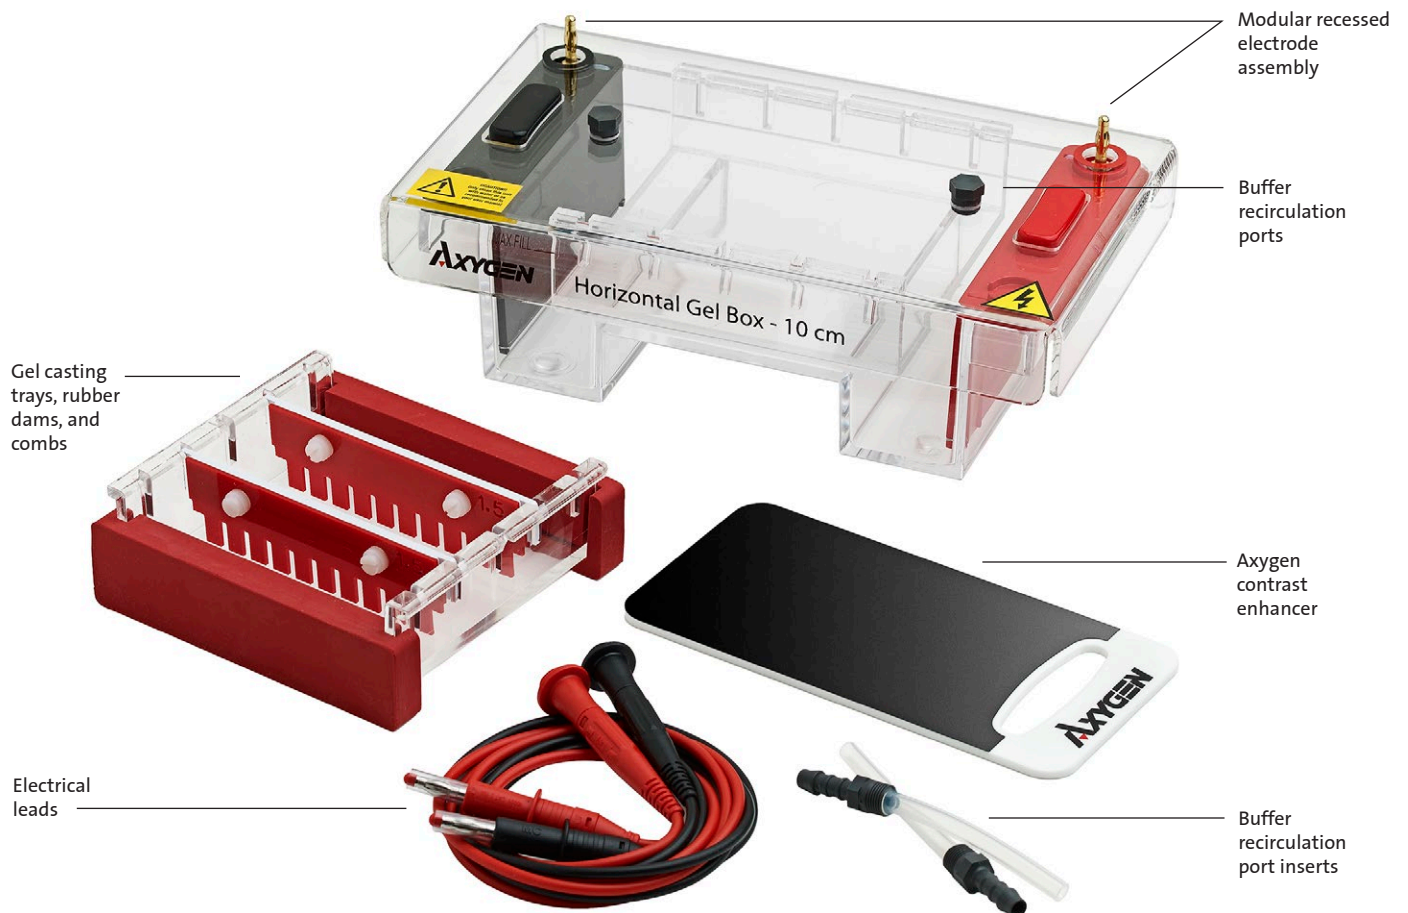

Axygen® Horizontal Gel Boxes

Four sizes of horizontal tanks. Each comes with 2 sizes of gel trays which allow for external gel casting. Three larger sizes come with recirculation ports for use as needed.



HGB-7

Tray sizes	7 x 7 cm, 7 x 10 cm
Recirculation ports	No
Combs	2 x 8 well, 1.5 mm thickness



HGB-10

Tray sizes	10 x 10 cm, 10 x 12 cm
Recirculation ports	Yes
Combs	2 x 10 multi-channel compatible well, 1.5 mm thickness



HGB-15

Tray sizes	15 x 10 cm, 15 x 15 cm
Recirculation ports	Yes
Combs	1 x 16 multi-channel compatible well, 1.5 mm thickness 1 x 20 well, 1.5 mm thickness



HGB-20

Tray sizes	20 x 20 cm, 20 x 25 cm
Recirculation ports	Yes
Combs	2 x 20 multi-channel compatible well, 1.5 mm thickness 2 x 40 multi-channel compatible well, 1.5 mm thickness

Ordering Information

Combs and Accessories

Axygen Horizontal Gel Box, 7 cm

Cat. No.	Description	Qty/Cs
HGB-7	Axygen horizontal gel box, 7 cm	1
HGB7-5-15	5-well comb for use with 7 cm gel box, 1.5 mm thickness	1
HGB7-8-075	8-well comb for use with 7 cm gel box, 0.75 mm thickness	1
HGB7-8-1	8-well comb for use with 7 cm gel box, 1.0 mm thickness	1
HGB7-10-1	10-well comb for use with 7 cm gel box, 1.0 mm thickness	1
HGB7-10-15	10-well comb for use with 7 cm gel box, 1.5 mm thickness	1
HGB7-12MC-1	12-well multi-channel compatible comb for use with 7 cm gel box, 1.0 mm thickness	1
HGB7-12MC-15	12-well multi-channel compatible comb for use with 7 cm gel box, 1.5 mm thickness	1
HGB7-16-1	16-well comb for use with 7 cm gel box, 1.0 mm thickness	1
HGB7-16-15	16-well comb for use with 7 cm gel box, 1.5 mm thickness	1

Axygen Horizontal Gel Box, 10 cm

Cat. No.	Description	Qty/Cs
HGB-10	Axygen horizontal gel box, 10 cm	1
HGB10-8-1	8-well comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-10MC-1	10-well multi-channel compatible comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-10MC-15	10-well multi-channel compatible comb for use with 10 cm gel box, 1.5 mm thickness	1
HGB10-12-075	12-well comb for use with 10 cm gel box, 0.75 mm thickness	1
HGB10-12-1	12-well comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-12-15	12-well comb for use with 10 cm gel box, 1.5 mm thickness	1
HGB10-16-075	16-well comb for use with 10 cm gel box, 0.75 mm thickness	1
HGB10-16-1	16-well comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-16-15	16-well comb for use with 10 cm gel box, 1.5 mm thickness	1
HGB10-16-2	16-well comb for use with 10 cm gel box, 2.0 mm thickness	1
HGB10-20MC-1	20-well multi-channel compatible comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-20MC-15	20-well multi-channel compatible comb for use with 10 cm gel box, 1.5 mm thickness	1
HGB10-25-1	25-well comb for use with 10 cm gel box, 1.0 mm thickness	1
HGB10-25-2	25-well comb for use with 10 cm gel box, 2.0 mm thickness	1

Ordering Information (Continued)

Axygen® Horizontal Gel Box, 15 cm

Cat. No.	Description	Qty/Cs
HGB-15	Axygen horizontal gel box, 15 cm	1
HGB15-8-15	8-well comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-10-1	10-well comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-10-15	10-well comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-12-1	12-well comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-12-15	12-well comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-14MC-1	14-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-14MC-15	14-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-14MC-2	14-well multi-channel compatible comb for use with 15 cm gel box, 2.0 mm thickness	1
HGB15-16-1	16-well comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-16MC-1	16-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-16MC-15	16-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-16MC-2	16-well multi-channel compatible comb for use with 15 cm gel box, 2.0 mm thickness	1
HGB15-18MC-1	18-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-18MC-15	18-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-20-075	20-well comb for use with 15 cm gel box, 0.75 mm thickness	1
HGB15-20-1	20-well comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-20-15	20-well comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-20-2	20-well comb for use with 15 cm gel box, 2.0 mm thickness	1
HGB15-28MC-075	28-well multi-channel compatible comb for use with 15 cm gel box, 0.75 mm thickness	1
HGB15-28MC-1	28-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-28MC-15	28-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-30MC-1	30-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness	1
HGB15-30MC-15	30-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness	1
HGB15-35-15	35-well comb for use with 15 cm gel box, 1.5 mm thickness	1

Axygen Horizontal Gel Box, 20 cm

Cat. No.	Description	Qty/Cs
HGB-20	Axygen horizontal gel box, 20 cm	1
HGB20-16-075	16-well comb for use with 20 cm gel box, 0.75 mm thickness	1
HGB20-20MC-075	20-well comb for use with 20 cm gel box, 0.75 mm thickness	1
HGB20-20MC-1	20-well multi-channel compatible comb for use with 20 cm gel box, 1.0 mm thickness	1
HGB20-20MC-15	20-well multi-channel compatible comb for use with 20 cm gel box, 1.5 mm thickness	1
HGB20-25-1	25-well comb for use with 20 cm gel box, 1.0 mm thickness	1
HGB20-30-1	30-well comb for use with 20 cm gel box, 1.0 mm thickness	1
HGB20-40MC-1	40-well multi-channel compatible comb for use with 20 cm gel box, 1.0 mm thickness	1
HGB20-40MC-15	40-well multi-channel compatible comb for use with 20 cm gel box, 1.5 mm thickness	1
HGB20-40MC-2	40-well multi-channel compatible comb for use with 20 cm gel box, 2.0 mm thickness	1
HGB20-50-2	50-well comb for use with 20 cm gel box, 2.0 mm thickness	1

Gel Trays

HGB7-7-GT	Gel tray 7 x 7 cm for use with 7 cm gel box, UV transparent	1
HGB7-10-GT	Gel tray 7 x 10 cm for use with 7 cm gel box, UV transparent	1
HGB10-10-GT	Gel tray 10 x 10 cm for use with 10 cm gel box, UV transparent	1
HGB15-10-GT	Gel tray 15 x 10 cm for use with 15 cm gel box, UV transparent	1
HGB15-15-GT	Gel tray 15 x 15 cm for use with 15 cm gel box, UV transparent	1
HGB20-20-GT	Gel tray 20 x 20 cm for use with 20 cm gel box, UV transparent	1

Replacement Electrodes

HGB7-NE	Replacement negative electrode, 7 cm	1
HGB7-PE	Replacement positive electrode, 7 cm	1
HGB10-NE	Replacement negative electrode, 10 cm	1
HGB10-PE	Replacement positive electrode, 10 cm	1
HGB15-NE	Replacement negative electrode, 15 cm	1
HGB15-PE	Replacement positive electrode, 15 cm	1
HGB20-NE	Replacement negative electrode, 20 cm	1
HGB20-PE	Replacement positive electrode, 20 cm	1

Rubber Casting Dams

HGB7-CD	Casting dams for use with 7 cm gel box, set of 2	1
HGB10-CD	Casting dams for use with 10 cm gel box, set of 2	1
HGB15-CD	Casting dams for use with 15 cm gel box, set of 2	1
HGB20-CD	Casting dams for use with 20 cm gel box, set of 2	1

Accessories

HGB7-AD	Power supply adapters, 4 mm to 4 mm, 2/pk	1
HGB7-AD2	Power supply adapters, 4 mm to 2 mm, 2/pk	1
HGB-EL	Electrical leads (1 pair)	1

Axygen® MaxyGene II Thermal Cyclers



The Axxygen MaxyGene II Thermal Cycler brings increased speed and advanced features, providing the premium performance you have come to expect from Axxygen brand products.

Features

- ▶ Unique flexible programming
- ▶ Rapid run times
- ▶ Improved workflow over traditional gradient cyclers
- ▶ Ramping rates up to 5°C/sec.
- ▶ Simple user interface
- ▶ Adjustable heated lid accommodates strips, tubes, and microplates
- ▶ Pre-programmed standard protocols
- ▶ 3-year warranty

Simplified Workflow for Improved Throughput

The Axxygen MaxyGene II Thermal Cycler is extremely simple to program, compact in design, and built to perform (Figure 1). It makes method optimization affordable and provides consistent, reliable results. Precision Thermal Control provides rapid heating and cooling of the precision-machined sample block by six independently temperature-controlled Peltier modules. A sophisticated algorithm program calculates sample temperature and triggers heating and cooling accordingly, minimizing over- and under-shooting.

The MaxyGene II Thermal Cycler may be programmed to operate between one and six different annealing temperatures across the block (Figure 2). This thermal cycler provides improved throughput by reducing time and simplifies workflow by reducing steps.

Figure 1. MaxyGene Thermal Cycler Screen


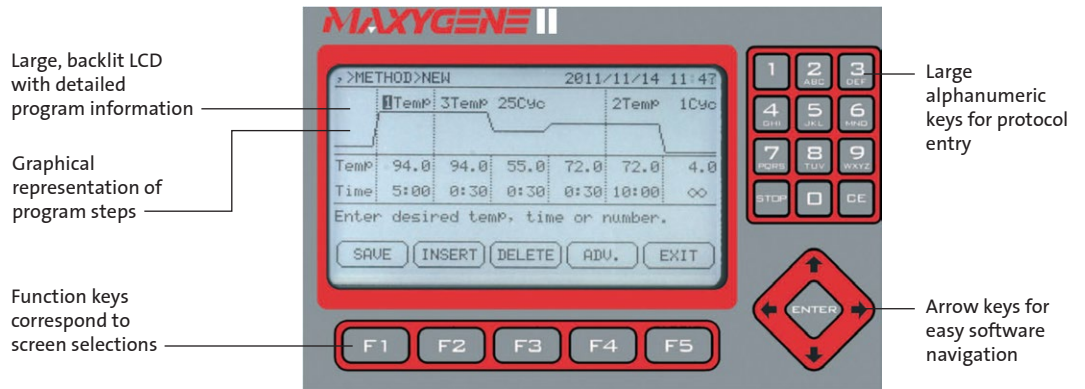


Figure 2. Primers designed to anneal to various genes (e.g., Gene A, B, and C) typically have different annealing temperatures (T_1 , T_2 , and T_3). The Axxygen MaxyGene II can perform up to six different reactions, significantly reducing steps and time.

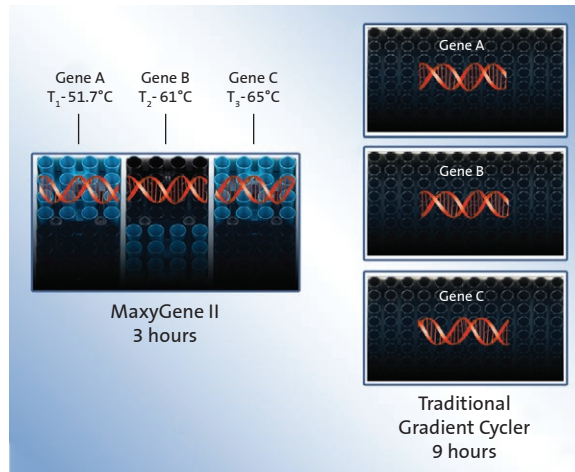

A variety of applications can be performed with the Axygen® MaxyGene II, from single temperature soaks to sophisticated multi-step programs. All of these are easily set up. The time or temperature of a cycling step can be automatically increased or decreased during successive cycles. This is useful for “touchdown” applications and for extending annealing times as enzyme is depleted. Programs may also be paused while running. During operation, actual times and temperatures are displayed. Estimated run times are automatically calculated, and a log of the last run can be displayed or downloaded to a printer or PC.

Specifications

Sample Capacity	1 x 96-well microplate, 128 x 0.2 mL strip tubes, 96 x 0.2 mL tubes
Programmable Temp. Range	4°C to 99.9°C
Temperature Control	Calculated or block
Temp. Accuracy/Uniformity	±0.5°C/±0.5°C
Max. Heating Range among the 6 Peltier Blocks	30°C to 99°C
Max. Temp Difference	24°C
Ramp Rates	5°C/sec. heating, 3.5°C/sec. cooling
Optimization Technology	Six 4 x 4 Peltier blocks with independently programmable temperatures
Programmable Lid Temperature	60°C to 65°C, 100°C to 115°C
Program Memory	200 complete programs
Temp. Increments/Decrements	Yes
Time Increments/Decrements	Yes
User Program Folders	Yes
Password Protected Programs	Yes
Communication	USB and RS232 ports
Dimensions (W x D x H)	24 x 43 x 25 cm
Weight	9 kg
Electrical	120V or 240V, 50/60 Hz

Ordering Information



Axygen MaxyGene II Thermal Cyclers

Cat. No.	Description	Qty/Pk	Qty/Cs
THERM-1001	MaxyGene II Thermal Cycler with 96-well block, 120V*	–	1
THERM-1000	MaxyGene II Thermal Cycler with 96-well block, 230V*	–	1

*Other block formats are available. Contact Corning for details.

Compatible Axygen PCR Products

PCR-0208-C	0.2 mL clear thin wall PCR 8-strip tubes	125	1,250
PCR-0208-CP-C	0.2 mL clear thin wall PCR 8-strip tubes and clear 8-strip caps	125	1,250
PCR-0208-FCP-C	0.2 mL clear thin wall PCR 8-strip tubes and clear flat 8-strip caps with writing surface	125	1,250
PCR-02-C	0.2 mL clear flat cap thin wall PCR tubes	1,000	10,000
PCR-02D-C	0.2 mL clear domed cap thin wall PCR tubes	1,000	10,000
PCR-02-FCP-C	0.2 mL clear flat PCR 8-strip caps with writing surface	125	1,250
PCR-2CP-RT-C	0.2 mL clear 8-strip caps for real-time PCR	125	1,250
PCR-96-FLT-C	96-well clear flat top non skirt PCR microplate	25	100
PCR-96-FS-C	96-well clear full skirt PCR microplate	10	50
PCR-96-FS-C-PBC	96-well clear full skirt PCR microplate with bar code	10	50
PCR-96-FS-W	96-well white full skirt PCR microplate	10	50
PCR-96M2-HS-C	96 well clear half skirt PCR microplate with a single notch	10	50
PCR-96M2-HS-C-PBC	96-well clear half skirt PCR microplate with a single notch with barcode	10	50
PCR-TS	PCR tight seal thermal sealing film for all thermal cyclers	100	500
UC-500	Optically clear pressure sensitive sealing film	100	500



Axygen® PlateMax Semi-automatic Plate Sealers



Easy-to-set time and temperature settings

Compact Footprint

The Axxygen PlateMax semi-automatic plate sealer is ideal for the low to medium throughput laboratory that requires uniform and consistent sealing of microplates. Sealing parameters are set and displayed via the user-friendly control panel and the sealing operation is automated to ensure consistent results.

Intuitive Layout

The PlateMax sealer control system features an intuitive layout with settings for all types of plates and sealing materials. The Mode button selects sealing time or temperature, and the control knob adjusts the setting.

Temperature can be precisely set in increments of 1°C and time in increments of 0.1 seconds. The PlateMax has a power saving option that turns the heater off if not in use. For those labs that choose to turn this function off, you can have the PlateMax ready to run all day.

- ▶ Accepts a wide range of microplates and heat seals
- ▶ User-friendly control system
- ▶ Large digital display shows all operating parameters
- ▶ Adjustable sealing temperature
- ▶ Precise temperature, timing, and pressure for consistent sealing

Simple 3-step Operation

1. Set time and temperature.
2. Place a microplate in the open drawer.
3. Place a heat seal on top of the plate and press the "SEAL" button.

Versatile and Convenient

The PlateMax sealer accepts a wide variety of plate types and heights. An aluminum adapter is used for PCR and standard assay plates. The motorized heated platen automatically adjusts for different plate heights and provides uniform pressure to ensure a quality seal. The platen incorporates a special non-stick coating. The side access door allows for easy cleaning.

Safe

The internal heating elements are situated inside the instrument casing and an internal safety door prevents access to the heated area. In addition, the motorized drawer features safety switches. If a hand or object obstructs the closing drawer, the drawer motor will reverse. This feature protects both the user and the instrument.

Specifications

Dimensions (W x D x H)	6.75 x 12.75 x 14.25 in. (171 x 324 x 362 mm)
Weight	27 lbs. (12 kg)
Sealing Temperature	OFF, 100°C to 190°C (increments of 1.0°C)
Temperature Accuracy	±1.0°C
Temperature Uniformity	±1.0°C
Sealing Time	0.5 to 10 sec. (increments of 0.1 sec)
Compatible Plate Materials	PP (Polypropylene), PS (Polystyrene), PE (Polyethylene)
Compatible Plate Types	Standard assay plates, deep-well storage plates, PCR plates: skirted, semi-skirted, non-skirted
Maximum Plate Height	45 mm
Compatible Sealing Film Types	Foil-polypropylene laminate Clear polyester-polypropylene laminate Clear polymer Thin clear polymer Foil-laminate Foil

Ordering Information

Axygen® PlateMax Semi-automatic Plate Sealers

Cat. No.	Description	Qty/Pk	Qty/Cs
HS-1120	PlateMax semi-automatic plate sealer, 120V, includes adapters for standard and deep-well microplates	–	1
HS-1230	PlateMax semi-automatic plate sealer, 230V, includes adapters for standard and deep-well microplates	–	1

Related Products

Cat. No.	Description	Qty/Pk	Qty/Cs
HS-100-QPCR	PlateMax UltraClear permanent heat sealing film for qPCR	100	5
HS-150-QPCR	PlateMax UltraClear peelable heat sealing film for qPCR	100	5
HS-200	PlateMax peelable heat sealing film for low temperature compound storage and PCR	100	5
HS-300	PlateMax pierceable heat sealing film for low temperature compound storage and PCR	100	5
HS-400	PlateMax peelable heat sealing film for compound storage	100	5
MF-300	PlateMax peelable heat sealing film with paper backing for general storage and PCR applications	100	1

Axygen® Axyspin Refrigerated Microcentrifuges



The Axxygen Axyspin refrigerated microcentrifuge is a high performance refrigerated microcentrifuge designed to quickly process samples for applications such as nucleic acid and protein preparation, purifications, extractions, and pelleting.

- ▶ Powerful refrigeration system cools to 4°C in 8 minutes
- ▶ 24 x 1.5/2.0 mL aluminum rotor included
- ▶ Exceptionally quiet and compact

Axygen Axyspin Refrigerated Microcentrifuge

The Axxygen Axyspin refrigerated microcentrifuge combines a powerful yet silent, brushless drive with an efficient cooling system, all in a compact footprint. Brushless drive technology has been fine-tuned in the Axyspin refrigerated microcentrifuge to deliver fast acceleration and deceleration of the solid aluminum rotor. The uniquely designed 24-place rotor allows easy access to the tops of sample tubes. Starting from room temperature, the chamber of the Axyspin refrigerated microcentrifuge cools to 4°C in just 8 minutes. The control panel features a backlit LCD display, which allows users to easily view running parameters while the large control knob facilitates digital setting of rotor speed, run time, and temperature. These high performance features allow for faster sample processing and less down time.

The rotor of the Axyspin refrigerated microcentrifuge can accommodate 1.5 and 2.0 mL Axxygen microcentrifuge tubes, including the most popular catalog numbers (MCT-150-C and MCT-200-C).

Specifications

Speed Range	500 to 13,500 rpm
Maximum RCF	17,135 x g
Maximum Capacity	24 x 1.5/2.0 mL
Timer	0.5 to 99 minutes, or continuous 0.5 to 99 minutes, or continuous "Quick" button for momentary operation
Temperature Range	-10° to 40°C
Dimensions (W x D x H)	10.9 x 17.75 x 9.75 in. (27.7 x 45 x 24.75 cm)
Weight	44 lbs. (20 kg)
Electrical	100V-230V, 50/60 Hz

Ordering Information

Axygen Axyspin Refrigerated Microcentrifuges

Cat. No.	Voltage	Plug Type	Qty/Cs
601-05-031	120V	US	1
601-05-021	230V	EU/UK	1
601-05-011	100V	US	1

Axygen Axyspin MaxyClear SnapLock Microcentrifuge Tubes



Cat. No.	Description	Qty/Pk	Qty/Cs
MCT-150-C	1.5 mL	500	5,000
MCT-200-C	2.0 mL	500	5,000

Axygen® Axyspin Mini Plate Spinner Centrifuges



The Axygen Axyspin Plate Spinner is the first centrifuge designed specifically for quick and easy centrifugation of samples in PCR plates.

- ▶ Capacity for two standard PCR plates
- ▶ Top loading design
- ▶ Exceptionally small footprint
- ▶ Starts and stops in seconds



Specifications

Speed	2,500 rpm
Maximum RCF	500 x g
Maximum Capacity	2 standard PCR microplates
Ambient Operating Range	4°C to 35°C
Dimensions	6 x 6 x 7 in. (16 x 16 x 18 cm)
Weight	3.3 lbs. (1.5 kg)

Ordering Information

Axygen Axyspin Mini Plate Spinner Centrifuges

Cat. No.	Voltage	Plug Type	Qty/Cs
Platespinner-120	120V/60Hz	US	1/each
Platespinner-230EU	230V/50Hz	EU	1/each
Platespinner-230UK	230V/50Hz	UK	1/each
Platespinner-230AU	230V/50Hz	AU	1/each
Platespinner-100JP	100V/60Hz	US	1/each

For related PCR products, see page 8.

Axygen® Axypet® Pro Single- and Multi-channel Pipettors



Axygen Axypet Pro Pipettors have been engineered to provide the highest levels of comfort, accuracy, and precision. The lightweight construction, contoured handle, and 4-digit counter were designed to ensure comfortable pipetting. All pipettors feature smooth plunger movement and extremely low pipetting forces to reduce wrist strain and fatigue (RSI). Colored pushbuttons enable easy size identification and reduce the risk of cross-contamination.

- Ergonomic handle design is a perfect fit for both the right and left hand
- Convenient one-hand volume setting with auto-lock system prevents accidental volume change during work
- 4-digit counter provides greater precision and is perfectly positioned for visibility at all times
- Single-channel pipettors are compatible with very narrow tubes
- Fully autoclavable and UV-resistant for sample protection against contaminations
- The multi-channel shafts retract individually for perfect tip loading and easier tip ejection
- Unique ejector lever system enables effortless tip ejection
- Easy in-lab calibration helps you quickly adjust your pipettor to various liquid types
- Individually tested and supplied with a certificate of quality
- 3-year warranty

Axygen Axypet Pro Starter Kit

Axygen Axypet Pro Starter Kit contains four variable volume pipettors in the most popular and universal volumes (0.5-10 µL, 2-20 µL, 20-200 µL, and 100-1000 µL), pipettor stand for four pipettors, and 3 racks with tips.

Ordering Information

Axygen Axypet Pro Pipettors

Single-channel

Cat. No.	Volume Range (µL)	Accuracy (%)	Precision (%)	Non-filtered Tip (µL)	Qty/Cs
AP-2-P	0.1 - 2	±40.0 to ±1.5	≤12.0 to ≤0.7	10	1
AP-10-P	0.5 - 10	±4.0 to ±1.0	≤2.8 to ≤0.4	10	1
AP-20-P	2 - 20	±3.5 to ±0.8	≤1.5 to ≤0.3	200	1
AP-50-P	5 - 50	±3.5 to ±0.8	≤1.3 to ≤0.3	200	1
AP-100-P	10 - 100	±3.0 to ±0.8	≤1.0 to ≤0.2	200	1
AP-200-P	20 - 200	±2.0 to ±0.6	≤0.7 to ≤0.2	200	1
AP-1000-P	100 - 1000	±2.5 to ±0.6	≤0.6 to ≤0.2	1000	1

8-channel

AP-8-10-P	0.5 - 10	±10.0 to ±2.0	≤8.0 to ≤1.2	10	1
AP-8-50-P	5 - 50	±4.0 to ±1.6	≤2.5 to ≤0.6	200	1
AP-8-200-P	20 - 200	±3.0 to ±1.0	≤1.5 to ≤0.6	200/300	1
AP-8-300-P	30 - 300	±3.0 to ±1.0	≤1.5 to ≤0.6	300	1

12-channel

AP-12-10-P	0.5 - 10	±10.0 to ±2.0	≤8.0 to ≤1.2	10	1
AP-12-50-P	5 - 50	±4.0 to ±1.6	≤2.5 to ≤0.6	200	1
AP-12-200-P	20 - 200	±3.0 to ±1.0	≤1.5 to ≤0.6	200/300	1
AP-12-300-P	30 - 300	±3.0 to ±1.0	≤1.5 to ≤0.6	300	1

Axygen Axypet Pro Starter Kit

Cat. No.	Description	Qty/Cs
AP-STR-KIT-P	Axygen Axypet Pro Starter Kit Includes: 4 single-channel pipettors: 0.5 to 10 µL (Cat. No. AP-10-P), 2 to 20 µL (Cat. No. AP-20-P), 20 to 200 µL (Cat. No. AP-200-P), 100 to 1000 µL (Cat. No. AP-1000-P); universal linear stand for four single-channel pipettors (Cat. No. AP-USD4-P); Axxygen MultiRack pipet tips: 10 µL (Cat. No. MR-10XT-R), 200 µL (Cat. No. MR-200-R), 1000 µL (Cat. No. MR-1000XT-R)	1



Axygen Axypet Pro Starter Kit

Axygen® Axypet® Single- and Multi-channel Pipettors



Axygen Axypet single- and 8-channel pipettors



Axygen Axypet 12-channel pipettor



Axygen Axypet starter kit

Axygen Axypet pipettors combine high levels of accuracy and precision with design innovations to make pipetting more comfortable during prolonged periods of time.

- ▶ Thumb-friendly soft spring pipetting system reduces fatigue
- ▶ Unique side EZject button option reduces thumb movement*
- ▶ Large ergonomic push button is easy on the thumb during contact
- ▶ Locking feature prevents accidental volume changes during pipetting procedures
- ▶ Micrometer is continuously adjustable for selection of whole or fractional volumes

Additional multi-channel pipettor features:

- ▶ Curved ejector bar allows tips to be ejected in steps, reducing the amount of force required for ejection
- ▶ Tip manifold rotates 360°
- ▶ Shafts withdraw when pressed against a row of tips
- ▶ Each shaft moves independently, minimizing jamming of tips

Ordering Information

Axygen Axypet Single- and Multi-channel Pipettors

Single-channel Pipettors

Cat. No.	Volume Range (µL)	Channels	Accuracy (Min./Max.)	Precision (Min./Max.)	Non-filtered Tip (µL)	Qty/Cs
AP-2	0.1 - 2	1	±40.0/±1.5%	≤12.0/≤0.7%	10	1
AP-10	0.5 - 10	1	±4.0/±0.5%	≤2.8/≤0.4%	10	1
AP-20	2 - 20	1	±3.0/±0.8%	≤1.5/≤0.3%	200	1
AP-50	5 - 50	1	±2.5/±0.8%	≤2.0/≤0.4%	200	1
AP-100	10 - 100	1	±1.6/±0.8%	≤0.8/≤0.2%	200	1
AP-200	20 - 200	1	±1.2/±0.6%	≤0.6/≤0.2%	200	1
AP-250	50 - 250	1	±1.0/±0.6%	≤0.4/≤0.3%	300	1
AP-1000	100 - 1,000	1	±1.6/±0.6%	≤0.4/≤0.15%	1,000	1
AP-5000	1,000 - 5,000	1	±0.6/±0.5%	≤0.25/≤0.15%	5,000	1
AP-10ML	1,000 - 10,000	1	±2.5/±0.5%	≤0.6/≤0.2%	10,000	1

Multi-channel Pipettors

AP-8-10	1 - 10	8	±8.0/±2.0%	≤6.0/≤1.2%	10	1
AP-8-50	5 - 50	8	±4.0/±1.6%	≤2.5/≤0.6%	200	1
AP-8-200	20 - 200	8	±3.0/±1.0%	≤1.5/≤0.6%	200/300	1
AP-8-300	50 - 300	8	±1.6/±1.0%	≤1.5/≤0.6%	300	1
AP-12-10	1 - 10	12	±8.0/±2.0%	≤6.0/≤1.2%	10	1
AP-12-50	5 - 50	12	±4.0/±1.6%	≤2.5/≤1.6%	200	1
AP-12-200	20 - 200	12	±3.0/±1.0%	≤1.5/≤0.6%	200/300	1
AP-12-300	50 - 300	12	±1.6/±1.0%	≤1.5/≤0.6%	300	1

*Left handed EZject button available by special order.

Axygen Axypet Starter Kits

Cat. No.	Description	Qty/Cs
AP-STR-KIT-1	Axygen Axypet Starter Kit-1 Includes: AP-20, AP-200, and AP-1000 pipettors; 1 rack each of 200 µL and 1000 µL Axypet tips; calibration tool; ejector spacers set; identification labels; lubricant; color identification rings; right-hand ejector button	1
AP-STR-KIT-2	Axygen Axypet Starter Kit-2 Includes: AP-10, AP-100, and AP-1000 pipettors; 1 rack each of 10 µL, 200 µL, and 1200 µL Axypet tips; calibration tool; ejector spacers set; identification labels; lubricant; color identification rings; right-hand ejector button	1

Axygen® Axyjet® Pipettor Accessories

Cat. No.	Description	Qty/Cs
AP-USD	Pipettor stand for one single-channel, 8-channel, or 12-channel pipettor	1
AP-USD4	Universal linear stand for four pipettors, transparent (four single-channel, maximum of two 8-channel or 12-channel pipettors)	1
AP-USD4-P	Universal linear stand for four pipettors, red (four single-channel, maximum of two 8-channel or 12-channel pipettors)	1
AP-USD6	Universal linear stand for six pipettors, transparent (six single-channel, maximum of three 8-channel or 12-channel pipettors)	1
AP-CSD	Carousel stand for six single-channel pipettors (not compatible with Axygen Axyjet Pro pipettor)	1



Universal linear 4-place stand



Carousel stand for six single-channel pipettors



Universal linear stand for one pipettor



Universal linear stand for four pipettors



Universal linear stand for six pipettors

Axygen® Axypet® 16-channel Pipettors



Ergonomic tip ejection lever

The Axypet 16-channel pipettor features a comfortable, lightweight design to help reduce hand fatigue, as well as an ergonomically designed ejector lever. Each channel of the pipettor has an individual piston assembly to ensure accuracy and precision when working at micro-volume levels. The tip holder allows for effortless and leak-free tip mounting, while the micrometer is continuously adjustable for selection of whole or fractional volumes.

Axypet 16-channel pipettor features:

- ▶ Compatible with 384-well microplates
- ▶ Ambidextrous design
- ▶ One-hand volume setting
- ▶ Color-coded volume controls for quick and easy selection
- ▶ Fully autoclavable pipettor body (except volume control)
- ▶ Tip manifold rotates 360°

Ordering Information

Axypet 16-channel Pipettor

Cat. No.	Volume Range (µL)	Channels	Accuracy (Min./Max.)	Precision (Min./Max.)	Qty/Cs
AP-16-2	0.2 - 2	16	±24.0/±4.0%	≤12.0/≤2.0%	1
AP-16	1.0* - 10	16	±5.0/±2.0%	≤3.6/≤1.0%	1
AP-16-50	5 - 50	16	±3.2/±1.40%	≤1.6/≤0.6%	1

*Minimum volume is 0.5 µL.

Compatible Axypet Pipet Tips

These polypropylene tips are RNase-/DNase-free and nonpyrogenic. Flexible walls and internal sealing rings ensure a secure fit with less force required to load and eject. Exclusive Axypet Maxymum Recovery® technology provides ultra-low retention and high yield.

Cat. No.	Product Description	Volume Range (µL)	Tips/Rack	Racks/Pk	Racks/Cs	Qty/Cs
T-1536-R	30 µL pipet tips, clear	0.5 - 30	384	10	5	19,200
T-1536-R-S	30 µL pipet tips, clear, sterile	0.5 - 30	384	10	5	19,200
T-1536-L-R	30 µL Maxymum Recovery pipet tips, clear	0.5 - 30	384	10	5	19,200
T-1536-L-R-S	30 µL Maxymum Recovery pipet tips, clear, sterile	0.5 - 30	384	10	5	19,200

Axygen® MotoPet® Pipet Controller



Pressure sensitive trigger buttons control rate of aspiration or dispensing.

Axygen MotoPet is a precise, motor powered, rechargeable pipet controller for volumes ranging from 0.5 mL to 100 mL. The unit has an ergonomic design and a highly efficient motor for fast aspiration and dispense of samples as large as 100 mL and full control and precision while dispensing volumes as small as 0.5 mL. It is compatible with both glass and plastic pipets.

Features

- ▶ Molded, lightweight handle for effortless pipetting even during extended use.
- ▶ Easily accessible switches allow you to choose the optimal operation mode depending on the volume and viscosity of the sample.
- ▶ PTFE filter prevents liquid from entering the unit.

Specifications

Volume Range	0.5 mL to 100 mL
Weight	230 g
Speed Settings	2 (high and low)
Dispensing Modes	2 (gravity and blow-out)
Filter	PTFE
Power Source	NiMH battery, up to 8 hours of continuous work
Sterilization	Nosepiece, pipet holder, and filter are autoclavable.



Battery charging station included.



PTFE filter protects samples from cross-contamination. The filter is autoclavable.



Digital display provides visual indication of battery condition, motor speed, and operating function.



Aspiration speed can be set to HIGH or LOW to adjust for the volume of the pipet and viscosity of the liquid.

Ordering Information

Axygen MotoPet Pipet Controller

Cat. No.	Description	Qty/Cs
MOTOPET-1	Axygen MotoPet cordless pipet controller, includes charger, wall hanger, and PTFE filter (0.2 µm)	1

Spare Parts

Cat. No.	Description	Qty/Cs
MOTO-SP-CONE	Nosepiece	1
MOTO-SP-FLTR-1	PTFE filter, 0.2 µm	5
MOTO-SP-FLTR-2	PTFE filter, 0.45 µm	5
MOTO-SP-HLDR	Pipet holder	1
MOTO-SP-PWR	Charger 9V: EU, US, UK, AU	1

For more specific information on claims, visit the Certificates page at www.corning.com/lifesciences.

Warranty/Disclaimer: Unless otherwise specified, all products are for research use only. Not intended for use in diagnostic or therapeutic procedures. Corning Life Sciences makes no claims regarding the performance of these products for clinical or diagnostic applications.

For additional product or technical information, visit www.corning.com/lifesciences or call 800.492.1110. Outside the United States, call +1.978.442.2200 or contact your local Corning sales office.

CORNING

Corning Incorporated
Life Sciences

836 North St.
Building 300, Suite 3401
Tewksbury, MA 01876
t 800.492.1110
t 978.442.2200
f 978.442.2476

www.corning.com/lifesciences

ASIA/PACIFIC

Australia/New Zealand
t 61 427286832

China
t 86 21 3338 4338
f 86 21 3338 4300

India
t 91 124 4604000
f 91 124 4604099

Japan

t 81 3-3586 1996
f 81 3-3586 1291

Korea
t 82 2-796-9500
f 82 2-796-9300

Singapore
t 65 6572-9740
f 65 6735-2913

Taiwan
t 886 2-2716-0338
f 886 2-2516-7500

EUROPE

CEurope@corning.com

France
t 0800 916 882
f 0800 918 636

Germany
t 0800 101 1153
f 0800 101 2427

The Netherlands
t 020 655 79 28
f 020 659 76 73

United Kingdom
t 0800 376 8660
f 0800 279 1117

All Other European Countries

t +31 (0) 206 59 60 51
f +31 (0) 206 59 76 73

LATIN AMERICA
grupoLA@corning.com

Brasil
t 55 (11) 3089-7400

Mexico
t (52-81) 8158-8400